

Closed Loop Hall Current Sensor CYHCS-B4V

This Hall Effect current sensor is based on closed loop compensating principle and can be used for measurement of DC and AC current, pulse currents etc. The output of the transducer reflects the real wave of the current carrying conductor.

Product Characteristics	Applications
<ul style="list-style-type: none">• Excellent accuracy• Very good linearity• Less power consumption• Current overload capability• Goods temperature properties	<ul style="list-style-type: none">• General Purpose Inverters• AC/DC Variable Speed Drivers• Battery Supplied Applications• Uninterruptible Power Supplies (UPS)• Switched Mode Power Supplies

ELECTRICAL CHARACTERISTICS

Part number	CYHCS-B4V-300A	CYHCS-B4V-400A	CYHCS-B4V-500A	CYHCS-B4V-600A
Rated current (RMS)	±300A	±400A	±500A	±600A
Max. input current	±600A	±700A	±800A	±900A
Load resistance (at rated current)	≥10kΩ			
Rated output voltage	±4V			
Supply voltage	±12V~ ±15 VDC ±5%			
Galvanic isolation	3kV RMS/50Hz/1min,			


ACCURACY DYNAMIC PERFORMANCE

Zero offset voltage	±10mV
Thermal drift of offset current	±0.01%/°C
Thermal drift of output current	±0.02%/°C
Response time	<1.0μs
Accuracy	±0.5%
Linearity	≤0.1% FS
Bandwidth(-3dB)	DC ~ 150kHz

GENERAL CHARACTERISTIC

Operating temperature	-25°C~+85°C
Storage temperature	-40°C~+90°C
Current consumption	<14mA

Dimensions (mm)

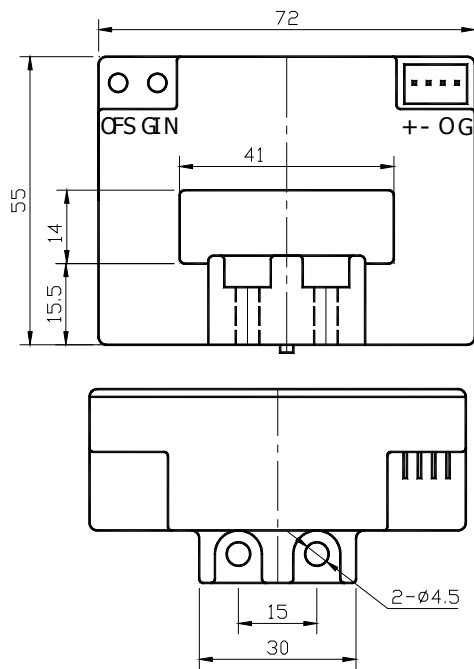

Terminal +: +15V,
Terminal -: -15V,
Terminal O: Output,
Terminal G: ground

